


IN THE CLAIMS:

Please amend Claim 1 as follows:

1. (Amended) Flame resistant, thermoplastic moulding compositions
consisting of

- A) 70 to 98 parts by weight of an aromatic polycarbonate,
- B) 0.5 to 20 parts by weight of a graft polymer,
- C) 0.5 to 5 parts by weight of a mixture of
- C.1) 10 to 90 wt.%, based on C, of a monophosphorus compound of formula (I)

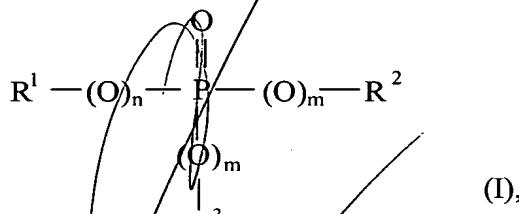


where

R^1 , R^2 and R^3 , independently of one another, signify C_1 - C_8 -alkyl, C_6 - C_{20} -aryl or C_7 - C_{12} -aralkyl,

m signifies 0 or 1 and

n signifies 0 or 1 and

C.2) 90 to 10 wt.%, based on C, of a phosphorus compound of formula (II)

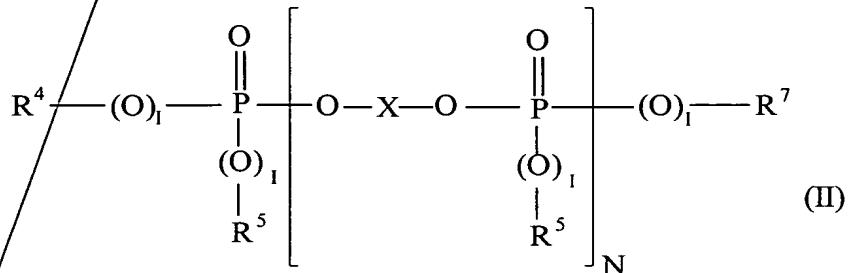

where

R^4, R^5, R^6, R^7 , independently of one another, signify C_1 - C_8 -alkyl, C_5 - C_6 -cycloalkyl, C_6 - C_{10} -aryl or C_7 - C_{12} -aralkyl,

I independently of one another, signifies 0 or 1,

N signifies 1 to 5 and

X signifies a mononuclear or polynuclear aromatic radical with 6 to 30 C atoms and

D) 0.05 to 5 parts by weight of a fluorinated polyolefin with an average particle diameter of 0.05 to 1000 μm , a density of 1.2 to 2.3 g/cm^3 and a fluorine content of 65 to 76 wt.%, and at least one additive selected from the group consisting of stabilizers, dyes, pigments, lubricants, mold release agents, fillers, reinforcing agents, nucleating agents and static agents.